

PRESCO


PIM Interface Module

The PIM (Presco Interface Module) is used to convert commonly used data formats into the required data format to suit the target device.

- ▶ USB-C connectivity for PC interfacing
- ▶ Can backup an existing database directly from a PAC, or easily upload databases into PAC controllers in remote locations or sites
- ▶ Convert Prove peripherals without Wiegand output to work with Wiegand controllers
- ▶ Convert Wiegand to Presco for cable runs beyond 100m and/or with high levels of interference then back to Wiegand for the controller
- ▶ Convert output from Wiegand devices to Presco for PAC controllers

Capable of over 20 different types of data conversions:

- ▶ Presco → USB, RS-232, Wiegand or Clock & Data
- ▶ Wiegand → Presco, USB, RS-232, Wiegand, Clock & Data or Presco PDA or KC series
- ▶ Clock & Data → Presco, USB, RS-232, Wiegand, Clock & Data or Presco PDA or KC series
- ▶ Dallas iButton™ → Presco, USB, RS-232, Wiegand, Clock & Data or Presco PDA or KC series
- ▶ RS-232 → Presco, Wiegand or Clock & Data
- ▶ USB → Presco, Wiegand, Clock & Data or Presco DLOG
- ▶ Presco DLOG → USB

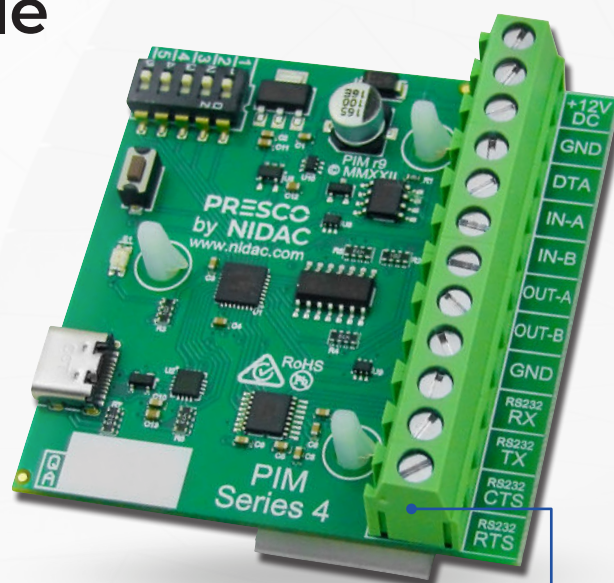

12 Volt D.C. operation, USB-C connectivity
Wiegand formats up to 128 bit & site codes up to 32 bit, Dallas iButton™ user memory up to 128 bit or 64 bit from factory ID, Read up to 32 digits/characters from Track 1, 2 or 3 from Clock & Data (magnetic card) format input



Suitable for elevator and lift car cable runs



Each unit factory tested with 5 year warranty included



Australian design, manufacture and support

