



## DESCRIPTION

The GT-2C is an audio / video tenant master station for the GT Series multi-tenant video intercom system. It is equipped with a button, door release button, and a programmable button. This master station can support up to three GT-2H sub master stations with the ability to communicate between them. When a visitor calls, the tenant station rings and video is displayed. The call is answered by the talk button. A handset (GT-HS) can be added to the unit if additional privacy is required. The unit features a 3.5" LCD screen, PTZ control button for the camera, and Picture Memory to record visitor images automatically when a call is placed to the unit. A personal video door station can be installed outside the tenant's door and connected to the GT-2C to replace peephole identification. The GT-2C is equipped with three programmable security / utility inputs and one emergency input. The utility input will trigger the tenant station while the security and emergency inputs will trigger both the tenant and the guard / concierge stations. Up to 500 total GT-2C stations can be used in one system.


## FEATURES

- 3.5" LCD screen
- Picture Memory for recording visitor images
- Hands-free audio communication
- Optional handset for privacy (GT-HS)
- Door release button
- Programmable button
- PTZ & brightness control
- Call tone volume control
- Communication volume control
- Security inputs for alerting tenant station and guard / concierge station
- Simple station programming via dip switch setting
- Input for personal tenant door station
- Internal communication with up to three sub master stations (GT-2H)
- Missed call from guard notification
- Supports six languages (ENGLISH, ESPAÑOL, FRANÇAIS, NEDERLANDS, DEUTSCH, ITALIANO)

# GT-2C

## Full Featured Video Tenant Master Station

### FEATURE CALL-OUT:

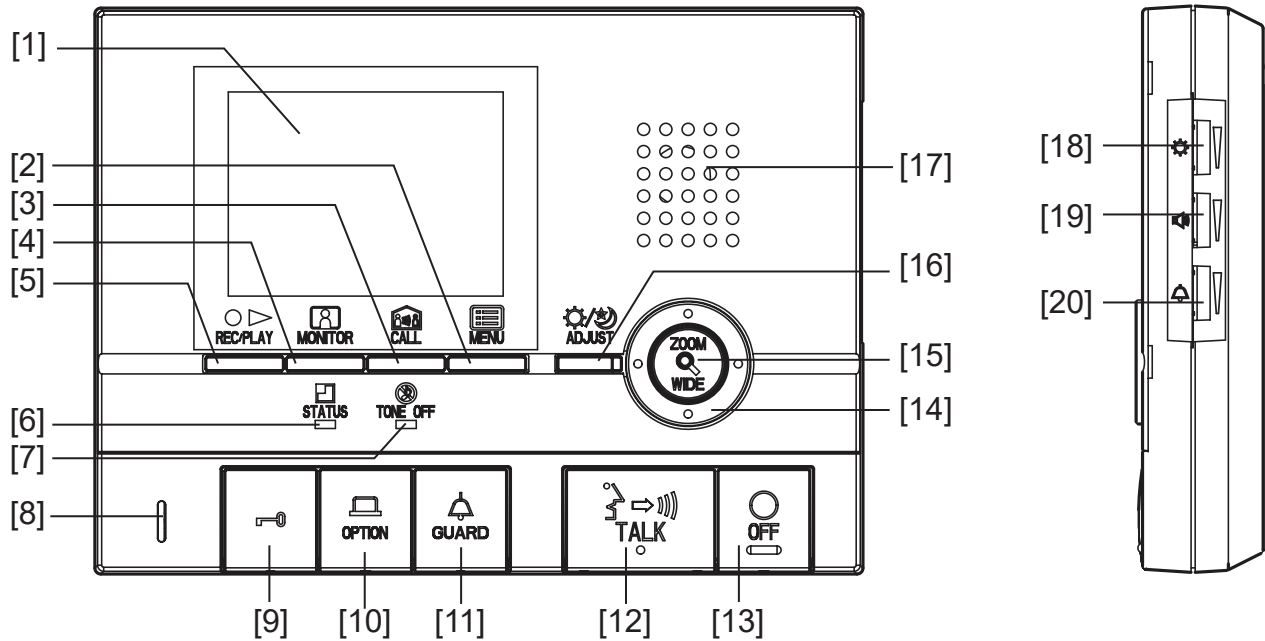

### FEATURE CALL-OUT DEFINITIONS

- [1] LCD video screen
- [2] MENU button
- [3] CALL button
- [4] MONITOR button
- [5] REC / PLAY button
- [6] STATUS LED (orange)
- [7] TONE OFF LED (orange)
- [8] Microphone
- [9] Door release button
- [10] OPTION button
- [11] GUARD Call / light button
- [12] TALK button w/ Transmit LED
- [13] OFF button
- [14] PanTilt control button
- [15] ZOOM / WIDE button
- [16] ADJUST button
- [17] Speaker
- [18] Screen brightness control (0~10)
- [19] Receive volume control (0~10)
- [20] Call tone volume control (0~10)

### SPECIFICATIONS

- Power Source:** 24V DC, PS-2420UL
- Current Consumption:** Max 260mA
- Communication:** Hands-free or push-to-talk
- Monitor:** 3.5 LCD
- Mounting:** Wall mount, desk mount with MCW-S/A (sold separately)
- Temperature:** 32~104°F (0~40°C)
- Dimensions:** 5-1/2" H x 7-1/2" W x 1-1/4" D
- Weight:** Approx. 1.04 lbs (470g)