



### DESCRIPTION

The GT-1C7 is an audio/video tenant station for the GT Series Multi-Tenant Video Intercom system. It is equipped with door release and talk buttons. In addition, the station has a concierge/security guard call button and an option button to control external devices, such as lights. The station also has Pan, Tilt, and Zoom control, as well as a light adjustment button for the PTZ camera at the entry. When a visitor calls, the tenant station rings and video is displayed on the screen. The call is answered by pushing the talk button. The GT-1C7 has the capability of calling the Concierge/Security Guard station(s), turning on an external light while speaking with a visitor at the entrance, and receiving an emergency tone from a pull cord or panic call button. The GT-1C7 has a slim, streamlined design and can be surface mounted. Only one GT-1C7 video station can be used per tenant. Communication is hands-free at the entrance station when a tenant answers the call. While speaking with the visitor, the GT-1C7 can communicate with either hands-free (VOX) or push-to-talk (PTT) functionality.


### FEATURES

- 7" LCD screen
- Hands-free audio communication
- Door release button
- Talk button
- Electrostatic concierge/security guard call button
- Option button for external devices
- PTZ and brightness control
- Call tone volume control
- Communication volume control

# GT-1C7

## 7" Video Tenant Station

### FEATURE CALL-OUT

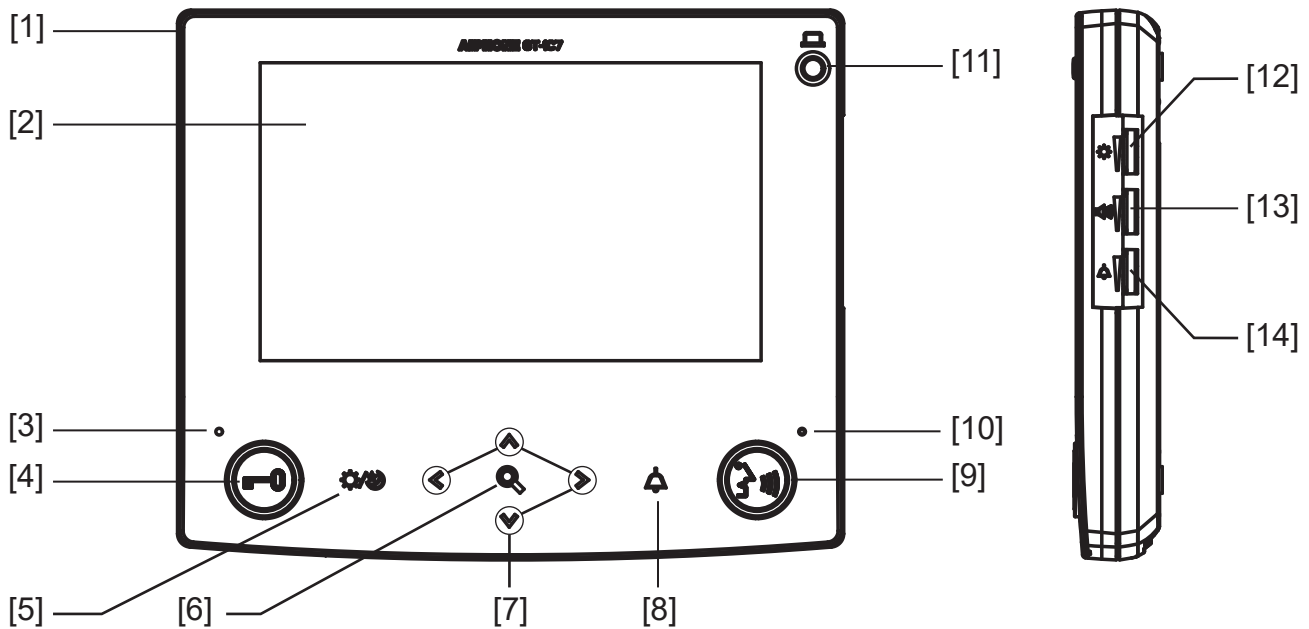

### FEATURE CALL-OUT DEFINITIONS

- [1] Speaker (on back of unit)
- [2] Color LCD video screen
- [3] Status indicator (orange)
- [4] Door release button and indicator (green)
- [5] Adjust button
- [6] Zoom/Wide button
- [7] PanTilt buttons
- [8] Concierge/security guard call/light button
- [9] Talk/Off button & indicator (orange)
- [10] Microphone
- [11] Option button
- [12] Screen brightness control (0-10)
- [13] Receive volume control (0-10)
- [14] Call tone volume control (0-10)

### SPECIFICATIONS

- Power Source:** 24V DC, supplied from GT-BC
- Communication:** Hands-free or Push-to-talk
- Screen:** 7" TFT LCD
- Mounting:** Surface wall mount
- Temperature:** 32~104°F (0~40°C)
- Dimensions:** 6-1/2" H x 7-7/8" W x 1" D
- Weight:** Approx. 1.25 lbs (570g)